

Panel Configuration


1. Number of Panels:

- For 2 1/2", 3 1/2", and 4 1/2" louver size, individual panel widths range from minimum 12" to maximum 30". Panels less than 12" in width (6" to 12") can be manufactured. Narrow panel surcharge applied. For 3 1/2" reinforced louvers are offered to a maximum width of 36" (*extra cost applies*)


2. Panel Fold Options:

- Please indicate the side you want the hinges to be placed: left or right.
- For Bi-fold, there must be an even number of panels.


Single Panel:

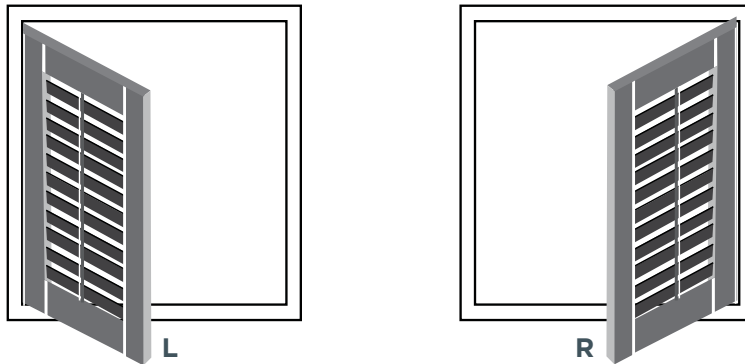

Two Panels:

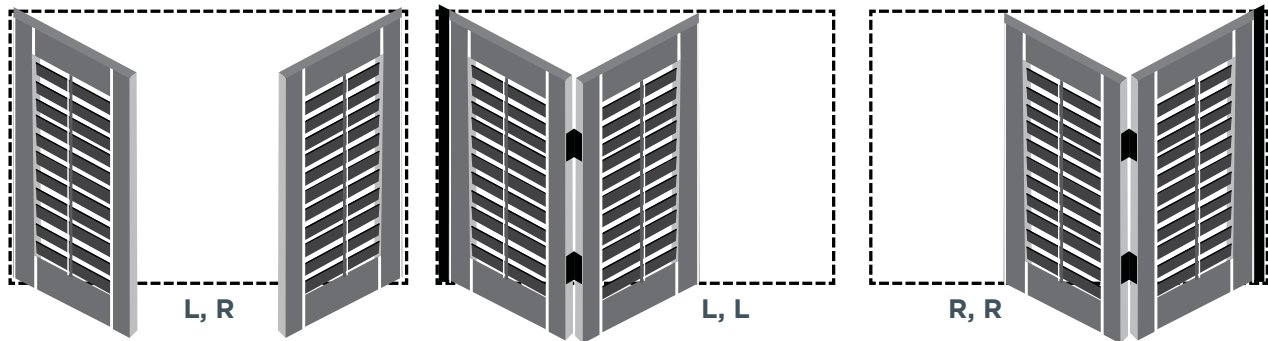


Three Panels:

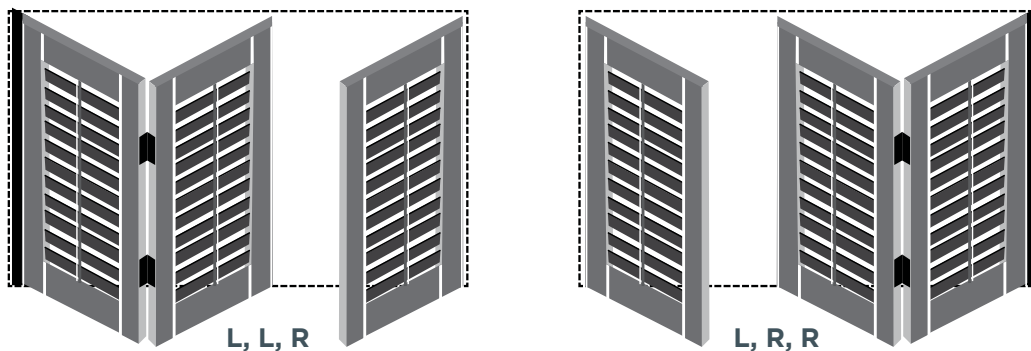


Panel Configuration


Three Panels:

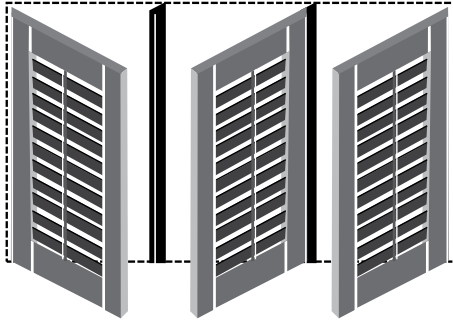


L, T, R, T, R

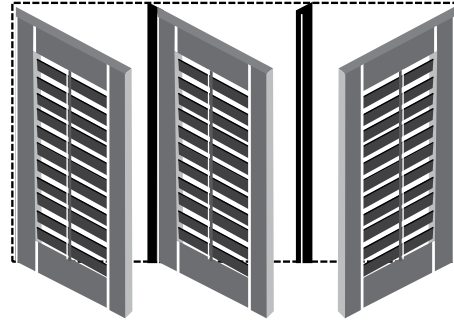

L, T, L, T, R

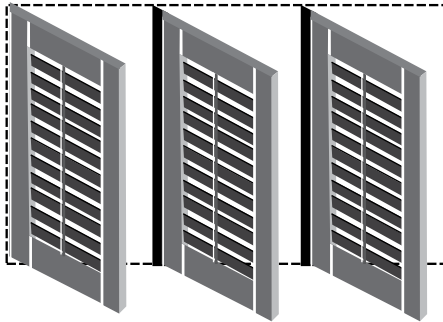


L, T, L, T, L

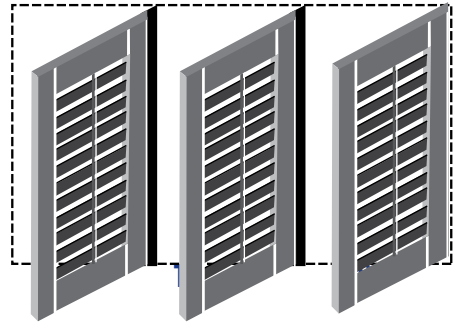


R, T, R, T, R


Four Panels:

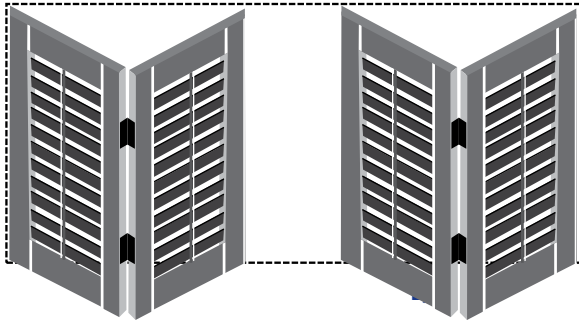


L, L, R, R

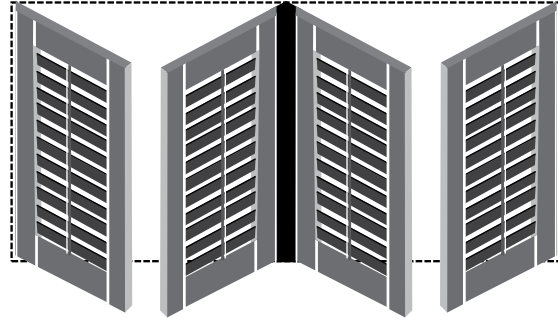

L, R, T, L, R

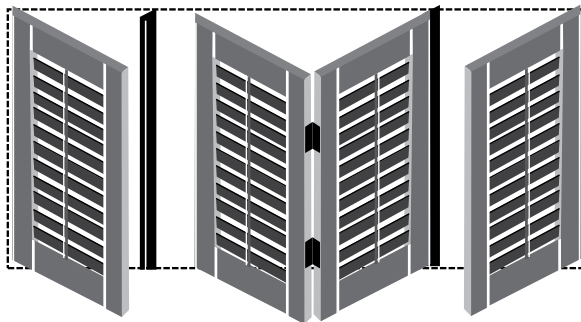

L, T, R, R, T, R

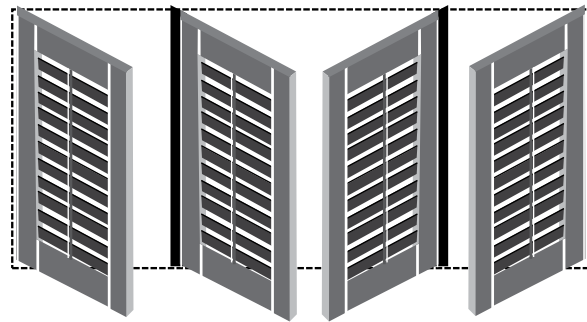


L, T, L, R, T, R




Panel Configuration

Four Panels:

R, T, R, T, R, T, R

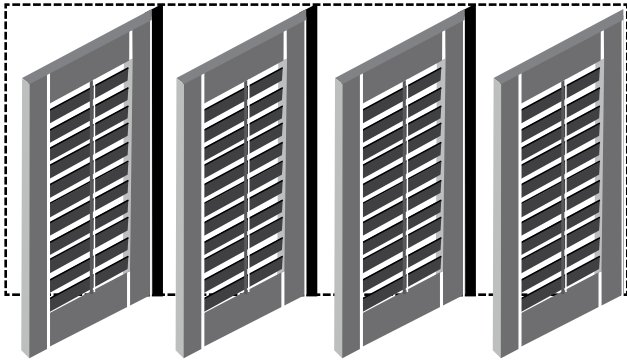

L, T, L, T, L, T, L

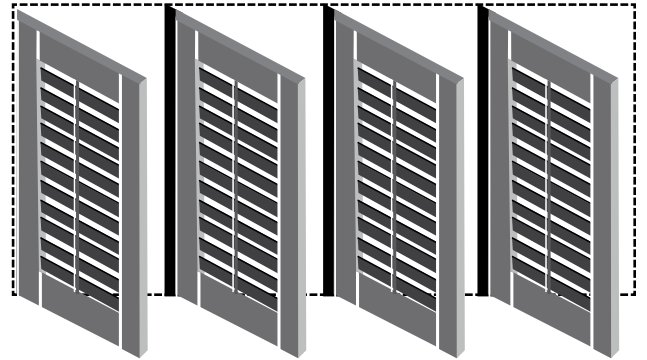

Six Panels:


L, R

T

L, R

T

L, R

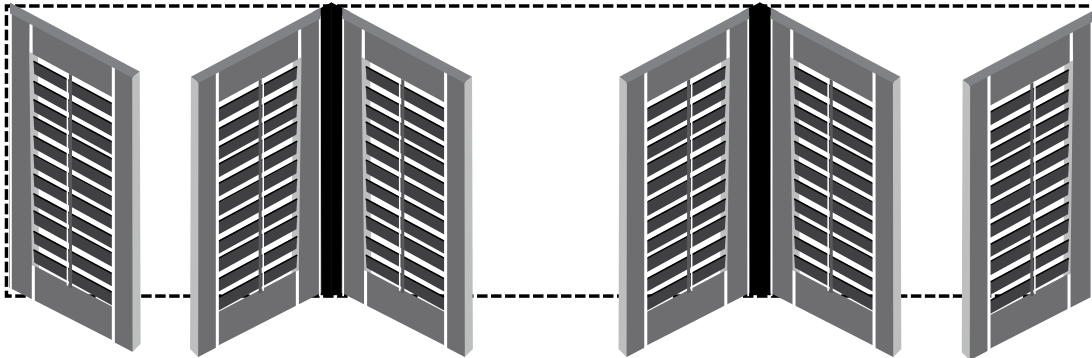

L,

T

L, L

R, R

T

R

