



## How to Care for Your Shutters:

### Recommended Cleaning Methods

- Dusting: Regular dusting will help maintain a “like-new” appearance
- Vacuuming: Using a brush attachment regular vacuuming will provide deeper cleaning
- Compressed Air: As long as the air is not heated (Hair dryer) compressed air can be used to blow off any dust
- Spot Cleaning: Shutters can be cleaned with a soft cloth or sponge with mild soap and water. Do not use ammonia based products

### Tension System

Over a period of time, it is possible that the louvers can loosen. Mirasol® Shutters have a tension screw installed into the side of each panel. Using a Phillips head screwdriver, the screw can be slightly tightened to increase the resistance level.

### Louver Replacement

To replace a damaged louver, the following tools are required:

Pliers, sharp putty knife (thin), replacement louver and kit (louver staple, regular louver pin and replacement pin)

#### Directions:

1. Using pliers, remove the staple from the damaged louver
2. Insert the putty knife between the louver and shoulder of the pin and strike the knife to shear off the pin. (see fig. A)
3. Remove the broken or damaged louver and the broken pin from the louver and the stile
4. Insert the spring pin into the stile. Depress the pin into the stile and slide the louver over the pin until it pops in. (see fig. B)
5. Re-attach the staple

Figure A

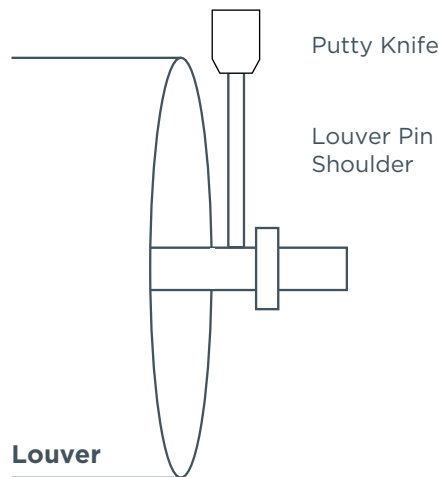


Figure B

